

Project Name		
Туре		
Part Number		
Quantity		
Notes		

Product Overview

The Reed RD2 is a recessed wall luminaire with a slim, vertical rectangular profile. It provides over 200 delivered lumens in a forward throw distribution with a medium narrow beam. Multiple fittings can be used to effectively illuminate wide pathways, stairways and cycleways.

Features


Lumen Output	215 lm
Power Consumption	< 9 W
Typical Lifetime	> 60,000 hrs (B10, L70, TM21 Reported)
Input Voltage	International: 220-240 Vac, 50 Hz North America: 120/277 Vac, 60 Hz
Control Protocols	DALI, 0-10 V
Weight	1.2 lb (0.5 kg)
IP Rating	IP66/67
IK Rating	IK9
BUG Rating	B0-U2-G1
Compliance	
Color Options	

Specifications

Hero - LS1252




Dimensions - LS1252

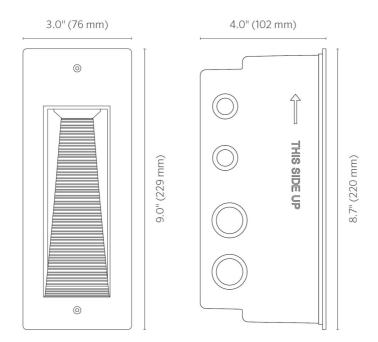

Configuration

For complete and up-to-date product options, configure the LS1252 using our online product configurator.

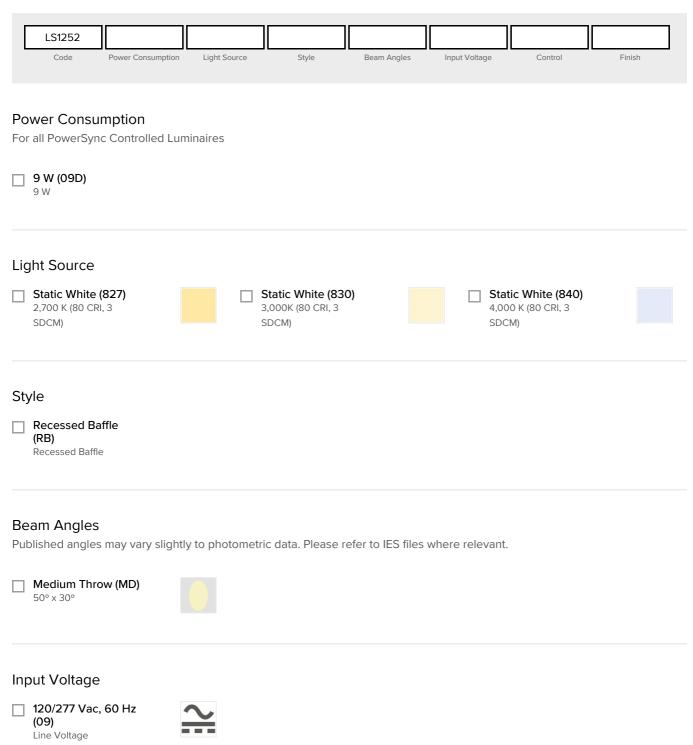

Reed RD2 - LS1252

Control

O-10 V (AH)
For single color
dimming applications via
0-10 V.

Finish

Custom powder coat colours are available. Please consult factory.

Black (BL) RAL9004 from RAL Classic collection (formerly CB)	Anthracite Gray (AG) RAL7016 from RAL Classic collection	Basalt Gray (BT) RAL7012 from RAL Classic collection
Graphite Gray (GH) Graphite Gray	Anodic Silver (SL) RAL9006 from RAL Classic collection (formerly CS)	White (WT) RAL9016 from RAL Classic collection
Dark Bronze (DB) RAL8019 from RAL Classic collection	Latte (LT) RAL7006 from RAL Classic collection	Dark Aluminium (DA) RAL9007 from RAL Classic collection
Custom RAL (CC) A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set- up fee.		

Accessories

Required Pre-Installation Kit

Specify Separately

Pre-Installation Kit (LS6335)
Required pre-installation
kit used for mounting
the Reed RD2 on any
flat surface.



Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

Custom Color Setup Fee (Custom RAL Color) Custom RAL colour setup fee

